




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 1/707	A1	(11) International Publication Number: WO 97/15985 (43) International Publication Date: 1 May 1997 (01.05.97)
<p>(21) International Application Number: PCT/FI96/00563</p> <p>(22) International Filing Date: 23 October 1996 (23.10.96)</p> <p>(30) Priority Data: 955113 26 October 1995 (26.10.95) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Nakolankatu 8, FIN-24100 Salo (FI).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): HOTTINEN, Ari [FI/FI]; Kielotie 30-32 C 25, FIN-01300 Vantaa (FI).</p> <p>(74) Agent: TEKNOPOLOIS KOLSTER OY; c/o Oy Kolster Ab, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: DATA TRANSMISSION METHOD, TRANSMITTER, AND RECEIVER

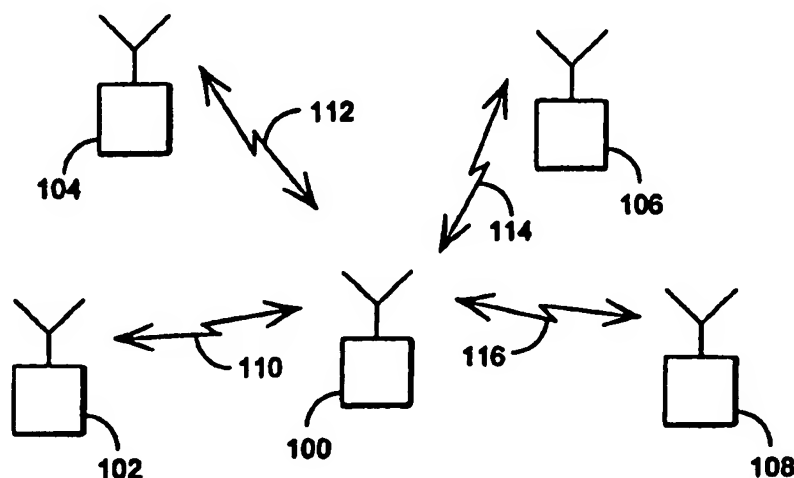

(57) Abstract

The invention relates to a transmitter, a receiver and a data transmission method in a CDMA cellular radio system comprising in each cell at least one base station (100) and a number of subscriber terminals (102-108), and in which method the base stations communicate with terminal equipments situated within their area by using an at least partly overlapping frequency band, and wherein the signal of each user is modulated with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rates of the users. In order to simplify multirate transmission, the pseudo-random sequence set (202-206) to be allocated to each user is selected on the basis of the symbol information contained in the user signal and the information rate required, and the subset to be modulated is selected from said set on the basis of the symbols to be transmitted.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Data transmission method, transmitter, and receiver

Field of the invention

5 The invention relates to a data transmission method in a CDMA cellular radio system comprising in each cell at least one base station and a number of subscriber terminals, and in which method the base stations communicate with terminal equipments situated within their area by using an at least partly
10 overlapping frequency band, and wherein the signal of each user is modulated with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rates of the users.

Background of the invention

15 CDMA (Code Division Multiple Access) is a multiple access method, which is based on the spread spectrum technique and which has been applied recently in cellular radio systems, in addition to the prior FDMA and TDMA methods. CDMA has several advantages over the
20 prior methods, for example spectral efficiency and the simplicity of frequency planning. An example of a known CDMA system is the broadband cellular radio standard EIA/TIA IS-95.

In the CDMA method, the narrow-band data signal
25 of the user is multiplied to a relatively wide band by a pseudo-random sequence or a spreading code having a considerably broader band than the data signal. In known test systems, bandwidths such as 1.25 MHz, 10 MHz and 25 MHz have been used. In connection with multiplying,
30 the data signal spreads to the entire band to be used. All users transmit by using the same frequency band simultaneously. A separate pseudo-random sequence is used over each connection between a base station and a mobile station, and the signals of the different users

can be distinguished from one another in the receivers on the basis of the pseudo-random sequence of each user.

Matched filters provided in the receivers are synchronized with a desired signal, which is recognized on the basis of the pseudo-random sequence. The data signal is restored in the receiver to the original band by multiplying it again by the same pseudo-random sequence that was used during the transmitting stage. Signals multiplied by some other pseudo-random sequence do not correlate in an ideal case and are therefore not restored to the narrow band. They appear thus as noise with respect to the desired signal. The pseudo-random sequences or spreading codes of the system are preferably selected in such a way that they are mutually orthogonal, i.e. they do not correlate with each other.

CDMA systems generally employ so-called short codes that have typically the same length as the symbols to be transmitted and that are also constant in time, i.e. each symbol of the signal to be transmitted is multiplied with the same spreading code. When short codes are used, some advantages have been achieved especially in connection with the multiuser detection (MUD) and interference cancellation methods. In the MUD methods, the signals of several users are detected simultaneously by utilizing all the received information in the detection of the signals. The parameters used in the known MUD algorithms, particularly the so-called correlation matrix that contains the mutual correlations of the received signal components, are constant when using short codes and therefore they do not have to be estimated symbol by symbol. The drawback of the short codes, however, is that their number is limited, which results in the shortage of useful codes having good correlation properties for example during a handover or in a multirate system.

5 A multirate system refers to a system where the user signals can have different types of bit or symbol rates, depending on the service used. For example speech and data services may require different transmission rates. In prior art arrangements a multirate system is supposed to be implemented with methods of code division or subcode modulation. The former method means that a user requiring a greater data rate is given a set of codes of the length of a symbol and they are transmitted
10 on parallel physical channels, each modulated with a different information symbol. In the latter method the user is given a set of codes having the length of a part of a symbol. In the subcode modulation it can be considered that the bit rate grows but the bit rate or
15 chip rate of the spreading code and the allocated code remain constant. According to the method, the subcodes having the length of a part of a symbol are modulated, in which case the properties of the subcodes can generally no longer be controlled.

20 A so-called R-CDMA method where subsets of a long code are modulated is previously known. The prior art also includes methods of applying orthogonal and biorthogonal coding methods, for example the reference
25 *Comparison of very low rate coding methods for CDMA radio communications system* by K. Rikkinen (IEEE ISSTA Proceedings, July 4-6, 1994, University of Oulu, Finland), pp. 268-272.

30 The drawback of the above-described known methods is that the code control is lost or the number of codes is not sufficient. A method of the R-CDMA type provides a large number of codes for use, but the drawback is the uncontrolled randomness of a single code in the properties of the codes.

Characteristics of the invention

The purpose of the present invention is to implement a CDMA data transmission method wherein the code set to be used can be increased so that the properties of the codes remain the same or are improved and that there is no uncontrolled randomness. The purpose of the invention is also to provide a multirate system in an advantageous manner. Another purpose of the invention is to enable multiuser detection in a rather simple manner.

This is achieved with a method of the type described in the preamble, characterized in that the pseudo-random sequence set to be allocated to each user is selected on the basis of the symbol information contained in the user signal and the information rate required, and that the subset to be modulated is selected from said set on the basis of the symbols to be transmitted.

The invention also relates to a transmitter in a CDMA cellular radio system comprising in each cell at least one base station and a number of subscriber terminals, the base stations communicating with terminal equipments situated within their area by using an at least partly overlapping frequency band, and which transmitter comprises means for modulating the user signal to be transmitted with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rate of the user signal. The transmitter according to the invention is characterized in that the transmitter comprises means for selecting the pseudo-random sequences modulating the user signal on the basis of the symbol information comprised by the signal and the information rate required, and means for selecting from said set the

subset to be modulated on the basis of the symbols to be transmitted.

5 The invention also relates to a receiver in a CDMA cellular radio system comprising in each cell at least one base station and a number of subscriber terminals, the base stations communicating with terminal equipments situated within their area by using an at least partly overlapping frequency band, and wherein the signal of each user is modulated with one or several
10 pseudo-random sequences the bit rates of which are substantially higher than the symbol rates of the users. The receiver according to the invention is characterized in that the receiver comprises means for identifying from the received signal, on the basis of the signal
15 correlations, the modulating pseudo-random sequence set used when transmitting the signal.

Description of the figures

In the following, the preferred embodiments of the invention will be described in greater detail with
20 reference to the examples according to the accompanying drawings, in which

Figure 1 illustrates a cellular radio system in which the method according to the invention can be applied,

25 Figure 2 illustrates the allocation of code sets to different connections,

Figure 3 is a block diagram illustrating the structure of a transmitter according to the invention,

30 Figure 4 is a block diagram illustrating the structure of a receiver according to the invention.

Description of the preferred embodiments

Figure 1 illustrates a cellular radio system wherein the method according to the invention can be applied. The system comprises in each cell at least one
35 base station 100 and a number of subscriber terminals

102 to 108 each of which is connected 110 - 116 to the base station. The same frequency is used over each connection, but each terminal equipment may have a different data rate, if required.

5 The invention thus relates to a method with which the pseudo-random sequence waveforms, i.e. spreading codes, to be used over different connections are selected, the information symbols of the users being multiplied with these waveforms before transmission.

10 Assume that $S = \bigcup_{k=1}^M S_k$ is a group of waveforms

determined for a given time slot $[0, T)$, the group being divided into $K \cdot M$ parts where K is the number of users and M is the dimension of the modulation used. Assume further that C is a selection function by means of which the symbols of the user to be transmitted, either coded or uncoded, are mapped to the aforementioned group, e.g. $C: \{-1, 1\}^{n_1} \rightarrow S$. The encoded bits are obtained by using a memory element, such as a convolution coder, as it is apparent for a person skilled in the art. The
15 aforementioned mapping C can be formed in such a way that the properties of the codes can be controlled and the required data transmission characteristics can be maximized with an implementation that is as simple as possible. It is assumed below, without restricting the
20 generality, that the information to be transmitted consists of frames of a given length, and that the aforementioned mapping C remains constant during the
25 frames.

30 In the simplest case, for example in the conventional BPSK CDMA system, the aforementioned mapping can be implemented in such a way that the selection function C is divided into parts

$C=(C_1,\dots,C_K)$. The information flow is therefore described with the function C_k :

$$C_k : \{-1,1\} \rightarrow \{S_k, -S_k\}.$$

In the arrangement according to the invention,
 5 the group of possible waveforms is increased in such a way that at each moment one user may have one or more waveforms without restricting them to orthogonal or biorthogonal waveforms.

The mapping of the uncoded or coded information
 10 flow of the K th user to the symbol level at moment i is denoted with the function

$$C^{(i)} = (C_1^{(i)}, \dots, C_K^{(i)}).$$

The mapping may therefore vary at different times. The code alphabet to be used, i.e. the set of spreading
 15 codes, should be defined in such a way that for example when the data rate changes, the optimality and control of the code selection are maintained. This is possible when the code alphabet is defined sufficiently large. In the arrangement according to the invention, a
 20 sufficient set S_k of different codes are reserved for each user, and a subset is selected from this reserved set at each instant, the information being transmitted by means of the subset. The information to be
 25 transmitted is utilized in the selection of the code subset. The code sets reserved for each user do not have to be mutually orthogonal in the arrangement according to the invention, which enables a large number of codes and therefore a great number of different information channels and data rates to be used. An example of a
 30 possible code set is the L-Kasami where the number of the optimized codes is considerably greater than the length of the code.

Assume for example that the amplitude of a
 waveform transmitted in the system is constant (e.g.
 35 BPSK). The symbol of the i th user, which can be assumed

here to consist of two bits, can be mapped to the waveforms S in the following manner:

5 + + -> s1
 + - -> s2
 - + -> -s2
 - - -> -s1

10 If the symbol period remains constant, the above-described method selects the waveform to be transmitted and doubles the data rate. If the symbol period is above 2T, the data rate does not change, but the signal dimension and thus the code properties are improved.

15 The allocation of code sets to different connections is illustrated in Figure 2. The figure shows by means of points 200 a group of waveforms among which the waveforms to be used over different connections are selected. The example of the figure has three connections 202, 204, 206, and a subset of waveforms have been reserved for each connection and the waveforms used over each connection at each instant are selected from the subset. The waveforms reserved for the different users are not necessarily mutually orthogonal. Even the same waveforms can be used over the connections, such as in the example of the figure over the connections 202 and 204 which comprise a group 208 of common waveforms.

20 In the arrangement according to the invention, the information symbols to be transmitted, which may be either coded or uncoded, affect the selection of the modulating waveform used at each instant. According to a preferred embodiment of the invention, the waveforms to be allocated and the set S_k are selected according to how many symbols the information to be transmitted contains per time unit. According to another second preferred embodiment of the invention, the first bits in the frames of the frame-structured information to be

25

30

35

transmitted determine the type of the waveform to be used, and the following bits determine the actual waveform from the selected waveform type. By applying this principle it is also possible to modulate the selected waveforms for example on the basis of the first bits of the frames.

In the following, a numerical application will be described by way of example. Assume that the bandwidth of the system is 5 MHz, the length of the spreading codes is 256 and the symbol rate is 20 ks/s. A subset of codes are reserved for each user. When a terminal equipment selects one waveform to be used for transmission, altogether $L = 2^{n_1}$ waveforms are needed for n_1 -fold data rate. If the system uses M-dimensional modulation, L/M waveforms are needed. $L/2$ signals are therefore needed for antipodal signals. If the code set is doubled for example for an offset of $N/2$ chips due to the delay spread of the channel, $L/4$ codes are needed for n_1 -fold data rate. For four-dimensional symbols, $L/8 = 2^{n_1-3}$ codes are needed. Therefore four-fold data rate can be obtained with one spreading code and with a simple receiver output stage. The size of the code set can be doubled by providing each user with two codes to be transmitted in parallel: five-fold data rate with two codes and six-fold data rate with three codes per user. The method can also be combined with a multirate method to be realized with subcode modulation.

The number of the codes to be used will not be a problem in the arrangement according to the invention. If it is assumed for example that one user has an eight-fold data rate with the symbol rate of 160 ks/s, 5 users with the five-fold data rate of 100 ks/s and one hundred users with the lowest data rate, the number of the waveforms required is $128 + 5 \cdot 2^4 + 100 = 308$. From these 308 waveforms only 106 are simultaneously active at each

instant. The active codes can be selected from the desired code set, for example the L-Kasami, so that the correlations are controlled.

5 The method according to the invention can utilize the properties of the transmission channel in the selection of the code set. For example, if the channel delay spread is $T/2$, the set S may contain a code S_k and the $N/2$ cyclic shift thereof, where N is the length of the code. In such a case, the complexity of
10 the receiver is reduced, since the signal can be received with the same code.

The set S_k can also be realized by means of an orthogonal group H and a mixing sequence C_k :

$$S_k = H \text{ diag}(C_k).$$

15 This can be expanded in the following manner:

$$S_k = \begin{bmatrix} H \text{ diag}(c_{k,1}) \\ H \text{ diag}(c_{k,2}) \end{bmatrix}'$$

wherein the sequences $c_{k,i}$ are typically user-specific and they can be selected by means of the information symbols or they may be each other's cyclic shifts and
20 H is the Hadamard set.

Figure 3 is a general block diagram illustrating the structure of a transmitter according to the invention. The transmitter comprises a data source 300, means 302 for performing channel coding, means 304 for modulating the signal to be transmitted with one or several pseudo-random sequences, and radio-frequency means 306 that transfer the signal to be transmitted to the frequency range used over the radio path, and an antenna 308. The transmitter also comprises
25 a control unit 310 that controls the operation of the transmitter elements. The control unit 310 is typically realized by means of a microprocessor. The transmitter also comprises means 310 for selecting the pseudo-random
30

sequences modulating the user signal on the basis of the information contained in the user signal by utilizing the above-described methods. The transmitter to be implemented may naturally also comprise other components, such as filters, A/D converters and a user interface, such as a keyboard and a display unit, as it is apparent for a person skilled in the art, but since they are not essential to the present invention, they are not shown in the figure for the sake of clarity. Also, the transmitter may comprise for example a microphone and a speech coder instead of a data source.

According to a preferred embodiment of the invention, the transmitter comprises means (310) for selecting the pseudo-random sequences modulating the user signal according to how many symbols the signal to be transmitted comprises per time unit. According to another preferred embodiment of the invention, the means (310) of the transmitter select the type of the sequence set to be used on the basis of the first bits in the frame, and they select the actual sequences from the selected sequence type on the basis of the last bits.

Examine next the structure of the receiver according to the invention. The complexity of the receiver structure depends on the number of the waveforms used. Each additional phase shift doubles the number of the correlators required. Figure 4 illustrates a possible structure of the receiver according to the invention by means of a block diagram. The receiver comprises an antenna 400 receiving a signal that is applied to radio-frequency parts 402 where the signal is converted into an intermediate frequency. The resulting signal is applied further to processing means 404, typically a signal processor, where one or more modulating waveforms or spreading codes used are detected from the received signal.

5 The function of the means 404 is to identify
for each symbol interval which waveform has been used.
The actual code detection is carried out in the signal
processing means 406 where the multiuser detection can
also be applied or desired known interference
cancellation methods can be applied. The interference
cancellation can be carried out for example in such a
manner that the interference signals are regenerated and
they are subtracted from the desired transmission in the
10 order of magnitude. In the receiver the signal
processing is distributed into two parts, the first one
404 including the code detection and the second one 406
comprising the actual detection. After the detection the
obtained signal 410 is further applied to other parts
15 of the receiver. In the practical implementation, the
aforementioned elements can naturally be combined into
one physical component, as it is apparent for a person
skilled in the art. There may also be feedback between
the blocks. The feedback 412 from the detection means
20 to the processing unit 404 enables for example the use
of multiuser detection in the code selection. Feedback
information may comprise for example symbol decisions
of the user, channel parameters or a regenerated
wideband or narrow-band interference signal. The
25 feedback 414 can also be carried out from the later
stages of the receiver. For example symbol decisions can
be obtained after the channel decoder, for instance. By
means of the feedback it is possible to decrease known
interference components in the processing unit 404.

30 The receiver to be implemented may naturally
also comprise other components, such as filters, D/A
converters and a user interface, such as a keyboard and
a display unit, as it is apparent for a person skilled
in the art, but since they are not essential to the

present invention, they are not shown in the figure for the sake of clarity.

5 Even though the invention is described above with reference to the example according to the accompanying drawings, it is clear that the invention is not limited thereto, but it can be modified in many ways within the scope of the inventive idea disclosed in the appended claims.

10 It is apparent for a person skilled in the art that for example the transmitter according to the invention may also utilize other known methods for increasing the data rate, such as changing the code amplification and parallel transmission.

Claims:

1. A data transmission method in a CDMA cellular radio system comprising in each cell at least one base station (100) and a number of subscriber terminals (102 - 108), and in which method the base stations communicate with terminal equipments situated within their area by using an at least partly overlapping frequency band, and wherein the signal of each user is modulated with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rates of the users, c h a r a c t e r i z e d in that the pseudo-random sequence set to be allocated to each user is selected on the basis of the symbol information contained in the user signal and the information rate required, and that the subset to be modulated is selected from said set on the basis of the symbols to be transmitted.

2. A method according to claim 1, c h a r a c t e r i z e d in that at least one sequence allocated to a user is not orthogonal with another sequence allocated to the user.

3. A method according to claim 1, c h a r a c t e r i z e d in that the pseudo-random sequences allocated to each user are selected according to how many symbols per time unit the signal to be transmitted contains.

4. A method according to claim 1, c h a r a c t e r i z e d in that two or more pseudo-random sequences are reserved for each user, and that when the user signal is transmitted, the pseudo-random sequences to be used at each instant are selected from the set of reserved sequences on the basis of the current symbol information of the signal.

5. A method according to claim 1, c h a r a c-
t e r i z e d in that the symbols to be modulated with
the pseudo-random sequence are frame-structured bits,
and that some of the frame bits determine the sequence
set to be used and some determine the actual sequences
from the selected sequence set.

6. A method according to claim 1, c h a r a c-
t e r i z e d in that the symbols to be modulated with
the pseudo-random sequences are coded symbols.

7. A method according to claim 1, c h a r a c-
t e r i z e d in that the system employs connections
comprising different data rates, and that the
connections of different data rates of a user are
realized user-specifically with different numbers of
pseudo-random sequences.

8. A method according to claim 1, c h a r a c-
t e r i z e d in that the same pseudo-random sequence
can be simultaneously used by more than one user within
the same coverage area.

9. A method according to claim 1, c h a r a c-
t e r i z e d in that some of the sequences allocated
to a user constitute a cyclic shift from another
possible sequence.

10. A method according to claim 1, c h a r a c-
t e r i z e d in that one or more of the selected
codes to be transmitted are multiplied with a sequence
that is selected on the basis of the information to be
transmitted.

11. A transmitter in a CDMA cellular radio
system comprising in each cell at least one base station
(100) and a number of subscriber terminals (102 - 108),
the base stations communicating with terminal equipments
situated within their area by using an at least partly
overlapping frequency band, and which transmitter
comprises means (304) for modulating the user signal to

be transmitted with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rate of the user signal, characterized in that the transmitter comprises means (310) for selecting the pseudo-random sequences modulating the user signal on the basis of the symbol information comprised by the signal and the information rate required, and means (310) for selecting from said set the subset to be modulated on the basis of the symbols to be transmitted.

12. A transmitter according to claim 11, characterized in that the transmitter comprises means (310) for selecting the pseudo-random sequences modulating the user signal in such a way that at least one sequence allocated to the user is not orthogonal with another sequence allocated to the user.

13. A transmitter according to claim 11, characterized in that the transmitter comprises means (310) for allocating two or more pseudo-random sequences for use over the connection, and means (310) for selecting the pseudo-random sequences to be used at each instant from the set of allocated sequences on the basis of the current symbol information of the signal.

14. A transmitter according to claim 11, characterized in that the symbols to be modulated with the pseudo-random sequence are frame-structured bits, and that the transmitter comprises means (310) for selecting the type of the sequence set to be used on the basis of some bits in the frame, and means (310) for selecting the actual sequences from the selected sequence type on the basis of some other bits in the frame.

15. A transmitter according to claim 11, characterized in that the transmitter

comprises means (302) for encoding the bits to be transmitted before they are multiplied with the selected pseudo-random sequence.

5 16. A receiver in a CDMA cellular radio system comprising in each cell at least one base station (100) and a number of subscriber terminals (102 - 108), the base stations communicating with terminal equipments situated within their area by using an at least partly overlapping frequency band, and wherein the signal of
10 each user is modulated with one or several pseudo-random sequences the bit rates of which are substantially higher than the symbol rates of the users, characterized in that the receiver comprises means (404) for identifying from the received
15 signal, on the basis of the signal correlations, the modulating pseudo-random sequence set used when transmitting the signal.

17. A receiver according to claim 16, characterized in that the receiver comprises a
20 demodulator (406) which demodulates and detects simultaneously the signals of several different users.

18. A receiver according to claim 16, characterized in that the receiver comprises means
(406) for performing interference cancellation on the
25 received signal.

19. A receiver according to claim 16, characterized in that the receiver comprises a
feedback (412) from the demodulator (406) to the
identification means (404) for pseudo-random sequences.

1/2

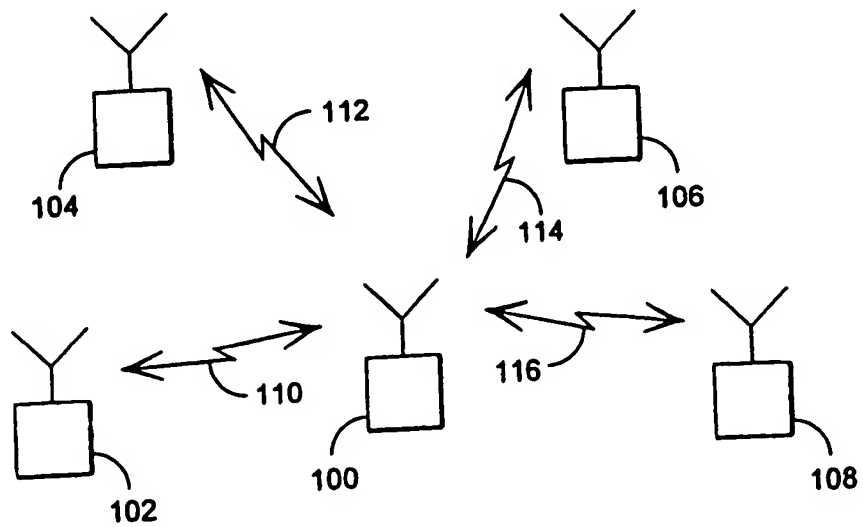


Fig. 1

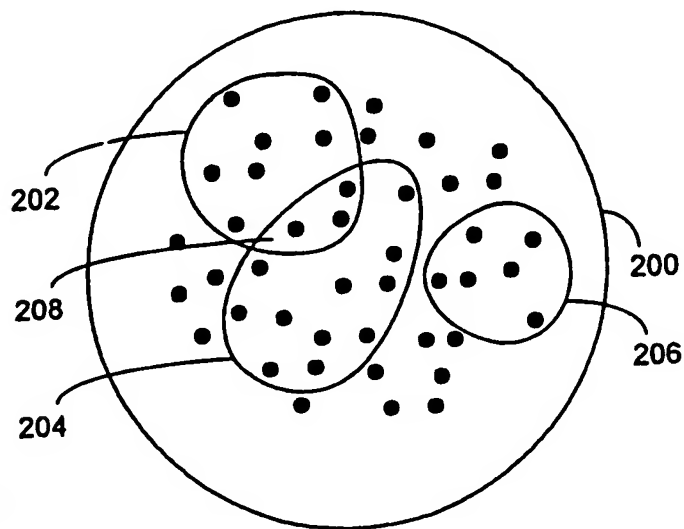


Fig. 2

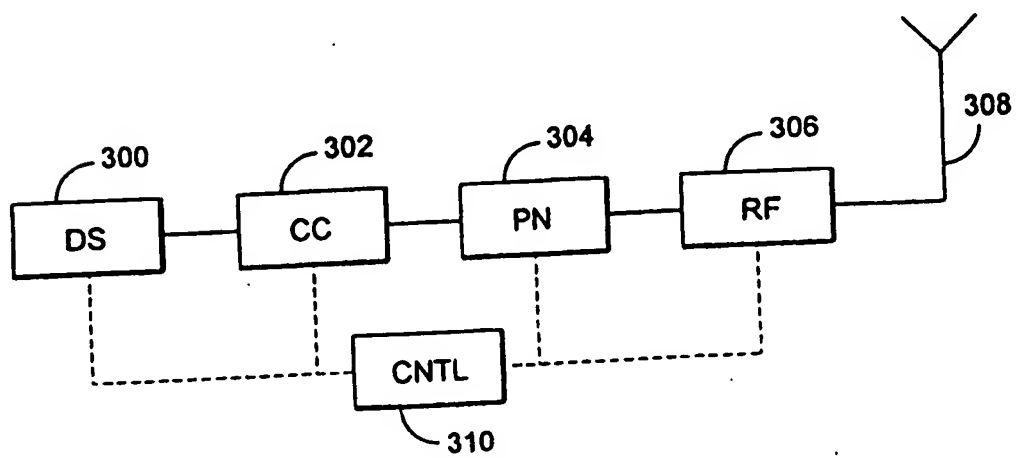


Fig. 3

2/2

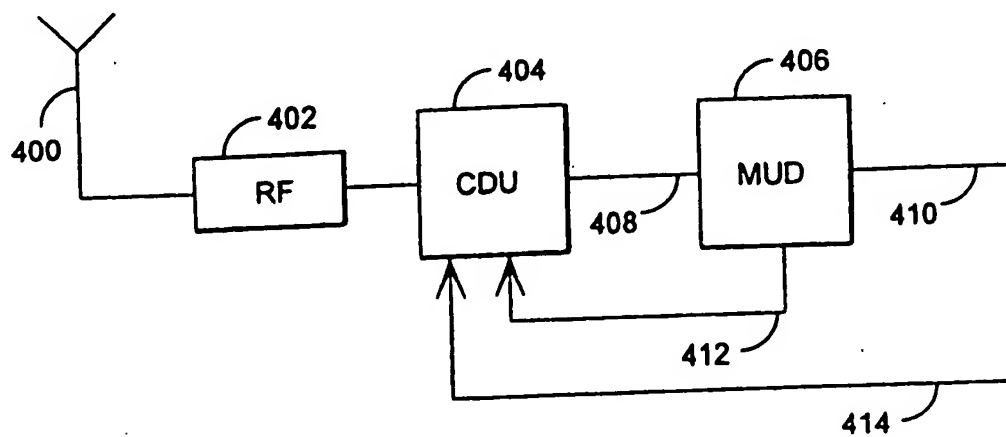


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 96/00563

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 1/707

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9503652 A1 (QUALCOMM INCORPORATED), 2 February 1995 (02.02.95), page 25, line 34 - page 26, line 6, claims 10-14, abstract	1-7, 11-15
A	--	8-10, 16-19
X	US 5341396 A (ROBERT P. HIGGINS), 23 August 1994 (23.08.94), column 7, line 54 - column 8, line 10	1, 36, 11, 15
A	-- -----	2, 4, 5, 7-10, 12-14, 16-19

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

- * Special categories of cited documents
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "Z" document member of the same patent family

Date of the actual completion of the international search

24 February 1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

24 -02- 1997

Authorized officer

Mikael Sollerhed
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

03/02/97

International application No.

PCT/FI 96/00563

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9503652	02/02/95	AU-A- 7368294 IL-D- 110373 ZA-A- 9405260	20/02/95 00/00/00 27/02/95
US-A- 5341396	23/08/94	NONE	